

Description

Name	DK-G63S
Battery	12V4.5AH / 12V7AH / 12V10AH / 24V5AH
Motor	12V15000 RPM of 390# driving motor 12V12000 RPM of 550# driving motor 12V4800 RPM of 380# steering motor for 2 motors version 12V8000 RPM of 390# steering motor for 4 motors version 24V12000 RPM of 555# driving motor 24V5000 RPM of 395#steering motor
Maximum weight	35 KGS
Dimension	1160*685*580 mm
Speed	3-5.5 KM/H
Charging time	8-12 hours
Remote control battery	AAA battery 1.5V*2 (not including)
Applicable age	37-95 months
Charger specification	Input: 220V / 110V 12V Output: DC12V1000mA 24V Output: DC28.8V800mA or DC24V1000mA

Charging the Drive Battery:



IMPORTANT! Before using the unit for the first time the battery needs to be charged for at least **8 to 12** hours - no more than **20** hours. Once battery is depleted, recharge for **8 to 12** hours - no more than **20** hours.

IMPORTANT!

Check the drive battery and charger (supply cord, connector) for wear and damage before charging. Do not charge the battery if damage has occurred. Only replace with the same type and voltage rechargeable battery and charger supplied by the manufacturer.

- Only use the rechargeable battery (or equivalent replacement) and charger supplied with your vehicle.
- Always turn power off and charge battery after riding.
- The drive battery should be charged when depleted, or if not used regularly, once a month. Failure to charge the battery as directed will cause permanent damage to the battery and will void the warranty.

STEPS:

1. Locate Charging Port.
2. Plug Charger plug into unit Charging Port.
3. Plug Charger into Wall outlet.
4. When battery is fully charged, unplug charger from the wall outlet and disconnect from charger port.

NOTE: The charger may feel warm during the charging. If excessively hot, unplug and replace.

NOTE: This product has charging protection: When charging, all functions are turned OFF.

Installation And Operation Manual



Model: DK-G63S

Applicable age: 37-95 months

Maximum weight: 35 KG

Execution Standard:

GB6675&GB19865 EN71&EN62115 ASTM-F963



AMG, „Mercedes-Benz“ and  are the intellectual property of Mercedes-Benz Group AG. They are used by Pinghu Dake Baby Carrier Co.,Ltd under license.

Pinghu Dake Baby Carrier Co.,Ltd

Address: No.88,Qinsha section,Pinglang Road,Xincang Town,
Pinghu City, Jiaxing City,Zhejiang Province ,China

Website: www.daketoys.com


Warning: This is a Child's Toy and NOT intended for Off-Road Use.

Installation steps

1.Spare parts list

Car body 1 PC	Steering wheel 1 PC	Rearview mirrors 1 Pair
Window shield 1 PC	Baseplate of seat 1 PC	Backrest of seat 1 PC
Windows 1 Pair	Hood 1 PC	Rear upper part 1 PC
Rear wheels 2 PCS	Front wheels 2 PCS	Wheel cover 4 PCS
Decorative spare tire 1 PC	Decoration parts of exhaust pipe 1 Pair	Spanner 2 PCS
Remote control 1 PC	Charger 1 PC	Manual 1 PC
Decoration on dashboard 1 PC (not includ under the MP4 version)		
Screw bag: 1 PC		
Including: M12 gasket - 7 PCS; M10 nut - 1 PC; M4*12 screw - 4 PCS;		

2.Names of spare parts

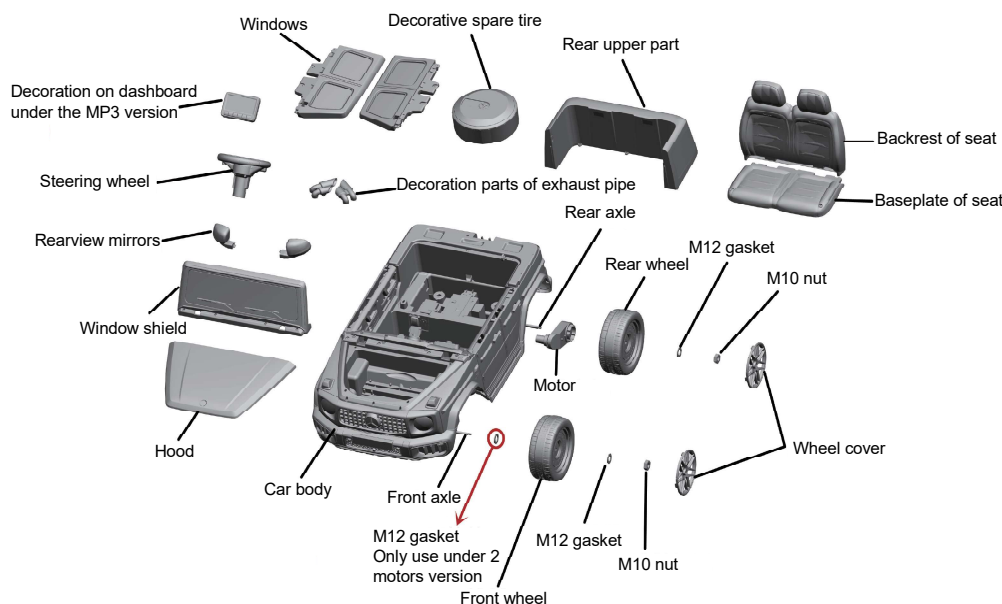

Instructions

- While driving , adult supervision is required all the time
- Always wear a helmet when driving
- Please don't drive near road or on the footpath.
- It is not recommended to drive the vehicle on wet surface or on slope greater than 15-degree.
- It is recommended to drive this vehicle on smooth surface only.
- Please don't drive this vehicle outdoors when it is raining.
- Make sure that the vehicle stop completely before changing direction from forward to reverse
- Please don't allow children to operate the charger or play with the battery
- Clean the vehicle with a dry cloth only.
- Please follow the correct weight and age limits allowed to drive this vehicle.
- It is prohibited to change the circuit or add other electric parts.
- Adults must teach their children about safe driving procedures.
- Please turn the power off when not in use.
- Check the seat to ensure it has been fitted and secured with a bolt before driving.
- Inspect all wires and connection of the vehicle periodically.
- Charging the battery should only be done by adults.
- Charging plug is located underneath the seat.
- In order to avoid accidents, please ensure the vehicle is safe before driving.
- Please don't let children touch the wheels or be near them when the car is moving.
- Please mind fingers when opening and closing doors.

WARNING:
To reduce the risk of injury, adult supervision is required. Never use in roadways, near motor vehicles, on or near steep inclines or steps, swimming pools or other bodies of water; always wear shoes, and never allow more than 1 rider.

Warning: This toy has no brake.

Warning: This toy cannot be used in the sands.

WARNING!

For safety reasons,
*please use this vehicle under adult guidance and supervision.

*do not use this product on main roads, slopes, highways or other dangerous places.

*children must wear shoes and protective gears when operating the vehicle.

*children should be seated with the seat belt fasten when driving.

*only load a maximum of 35Kg on the vehicle.

*only children aged 37 - 95 months should be allowed on this vehicle.

*use this toy strictly according to safety manual.

*please check the tires, breaks, steering wheels, seats and seat belts before operating vehicle.

*this toy vehicle should be used with caution and requires skill to avoid fall or collision with third parties.

*Non-rechargeable batteries are no to be recharged;

*The supply terminals are not to be short-circuited.

*Rechargeable batteries are to be removed from the toy before being charged;

*The toy should be regularly examined for damage to the cord, plug, enclosure and other parts, and in the event of such damage, they must not be used until the damage has been repaired.

-Only use the battery specified by the manufacturer

-Only use the charger specified by the manufacturer.

Pictures are for reference only, please adhere to the original Products as standard

The product must be assembled by Adults.

Warning! Not suitable for children under 36 months.

Long cord. Strangulation hazard.

Pictures are for reference only, please adhere to the original products as standard

WARNING:
The car contains battery that are non-replaceable.

The instruction manual must be retained since it contains important information.

WARNING:

For the purposes of recharging the battery, only use the detachable supply unit provided with this toy, DC adaptor.

WARNING:

The remote control is not a toy. It is for adult use only, and should not be used by a child. A close adult supervision is always required. Reception range may change significantly with weather, battery, and other environmental conditions.

WARNING:

RISK OF FIRE. DO not bypass. Replace only with ZCY1810RXR-RM-12V or JR1630RX-RM-12V or JR1932RX-RM-24V.

Troubleshooting

Problem: The vehicle cannot be driven.

Cause of the problem: the battery is insufficient

Please charge in time after each use, and charge at least once a month.


It is recommended to charge for 8-12 hours, not more than 20 hours.

Problem:The car does not move.

Answer : The battery is low, please charge for 8-12 hours

but not exceeding 20 hours.

Charge at least once a month to keep the battery cells active.

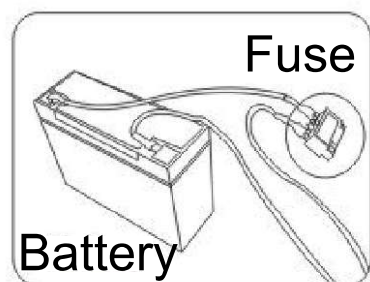

To avoid short fuse or power cut off:

1. Do not overload the product. Max load is 35Kg.
2. Do not drag any item behind this product.
3. Do not allow water or any liquid into electric parts.
4. Do not change wire system without a professional.

TROUBLESHOOTING

Problem:The car only runs for a short time.

Answer 1: The battery is low, please charge for 8-12 hours

but not exceeding 20 hours.

Charge at least once a month to keep the battery cells active.

Answer 2: The battery may need to be replaced depending on its charging history and age.

Problem:The sound does not work.

Please ensure the volume is turned up and the MP3 line is not connected. Sounds from steering wheel will not work when MP3 is plugged in.

Problem:Charger overheating.


It is normal for battery and charger to be slightly warm during charging.

If the charger feel excessively hot, please check for a current overload or battery short circuit.

3. Installation steps


Step 1: Take out rear upper part

Take out rear upper part of the car for coming use.

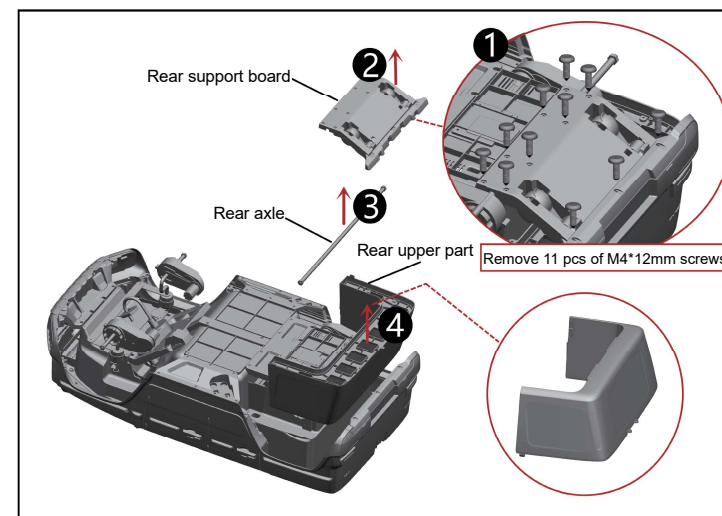

Step 2: Install rear support board


Put the rear support board onto the car body, and then fix it with 11 pcs of M4*12mm screws.

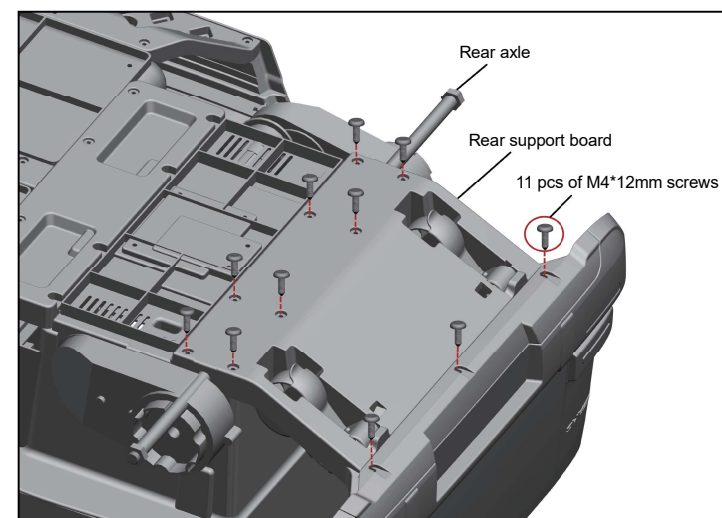

Installation steps

Step 3: Install decoration parts of exhaust pipe

Install decoration parts of exhaust pipe onto car body, both left and right sides.

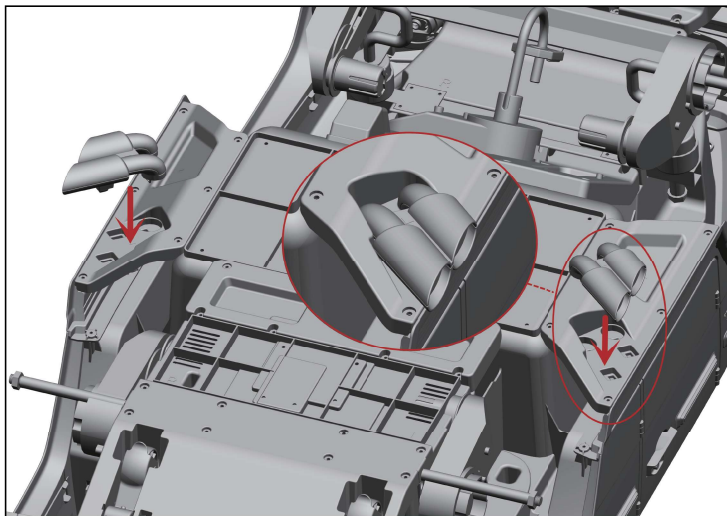


Step 4: Install front wheels

A: Under 2 motors version: install spare parts onto front axle following the sequences: M12 gasket - Front wheels - M12 gasket - M10 nut - Wheel cover.

B: Under 4 motors version: install spare parts onto front axle following the sequences: Front wheels - M12 gasket - M10 nut - Wheel cover.

* Under 2 motors version, there are no plum blossom parts on the front wheels. Under 4 motors version, the front and rear wheels are the same and can use randomly.

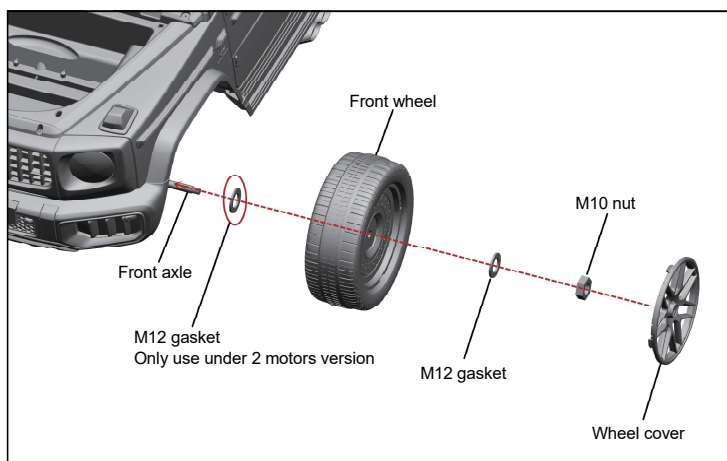

Instructions

Warning :

When replacing a replaceable battery of remote control, first open the lid and take out the old battery. Put in the new battery, pay attention to the positive and negative poles, and then cover the lid.

To ensure the safe use of this ride-on vehicle, regular maintenance is required.

1)Regular Maintenance

Regular inspection and maintenance are essential to keep the vehicle safe for use.

2)Parts to be Checked Regularly

-The following parts should be checked, maintained and, if necessary, replaced regularly:

- Wheels and wheel assemblies
- Steering wheel and steering system
- Screws, bolts and connecting parts
- Drive components
- Battery and electrical connections

3)No Unauthorized Modifications

Do not modify the product in any way other than as described in these instructions.

4)Damaged Parts

Any damaged, worn or malfunctioning parts must be repaired or replaced immediately.

5)Sharp Edges Warning

During use, sharp edges may develop due to wear or damage.

These should be removed promptly. For example, replace damaged plastic parts or covers.

6)Self-locking Parts Warning

Self-locking nuts and other self-locking fasteners may lose their effectiveness after repeated assembly and disassembly.

Please check them regularly and replace if necessary.


7)Maintenance Frequency

Check the vehicle before each use

Perform a full inspection regularly (e.g. weekly or monthly depending on frequency of use)

Instructions

Connect with Remote Control

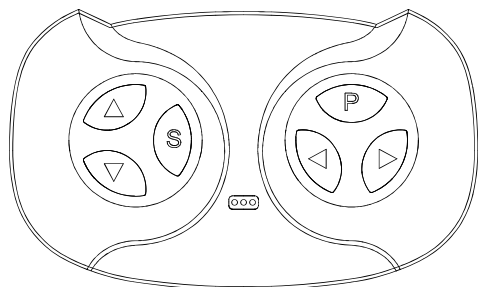

2.4G Remote Control Instructions

Step 1: The Remote Controller is loaded with two AAA batteries.


Step 2: Turn off the power switch on the vehicle.

Step 3: Hold down “▲” & “▼” keys for 3 seconds start match code, The first LED flicker. Now turn on the vehicle power switch

The red indicator lights stop flashing, and the code is successful.

Keys caption : “S” set up speed, 1 led lit up is low speed, 2 leds lit up is medium speed, 3 leds lit up is high speed,

“▲” Forward, “▼” Back, “◀” Left, “▶” Right, Press “P” key hold the brake, All LED flicker

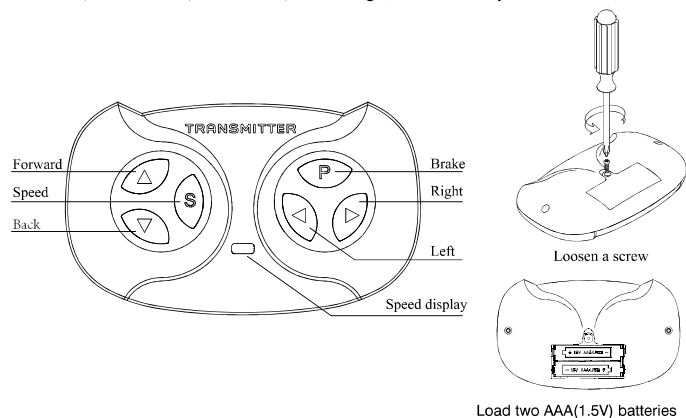

WARNING! Not for children under 3 years. Small parts. Choking hazard

- Load two AAA (1.5V) batteries according to the diagram.
- Non-rechargeable batteries are not to be recharged.
- Different types of batteries or new and used batteries are not to be mixed.
- Batteries are to be inserted with the correct polarity.
- Exhausted batteries are to be removed from the toy.
- The supply terminals are not to be short-circuited.
- The packaging must be retained since it contains important information.


*Manufactured according to FCC certification testing and EMC credential.

*This remote is to be used by adult only.

Installation steps

Step 5: Install rear wheels


Install spare parts onto rear axle following the sequences: Motors - Rear wheels - M12 gasket - M10 nut - Wheel cover.

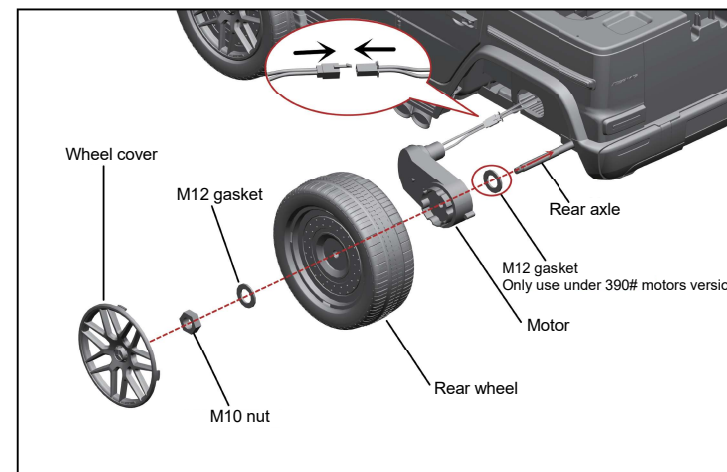

Step 6: Install steering wheel

A: Connect the steering wheel properly with the lines on dashboard.


B: Insert the steering wheel into the quick detach part.

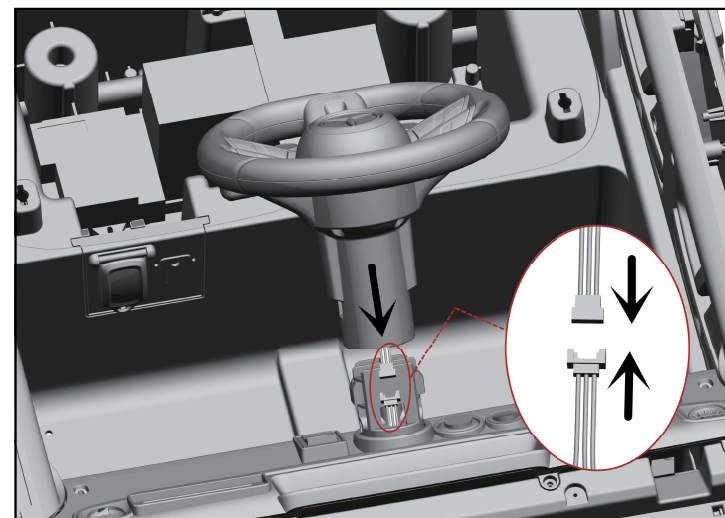

Installation steps

Step 7: Install decoration on dashboard or MP4 player

Insert the decoration on dashboard or MP4 player into dashboard according to the figure below.

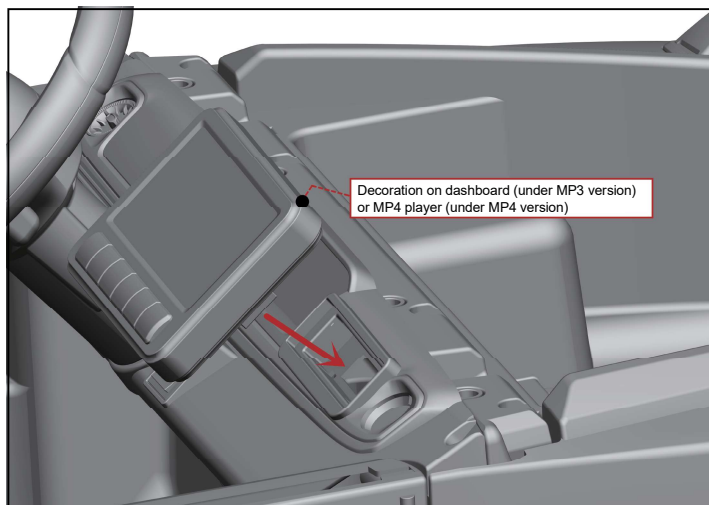

Step 8: Connect the power


Please connect the plug to the controller.

* According to the photo, there are charge hole, the switch of High / Low speeds and the switch of Manual / Remote, the switch of Manual / Remote is optional.

Description for the switch of Manual / Remote:


Under the Manual: the car only can drive by the child;

Under the Remote: the car only can drive by the remote control;

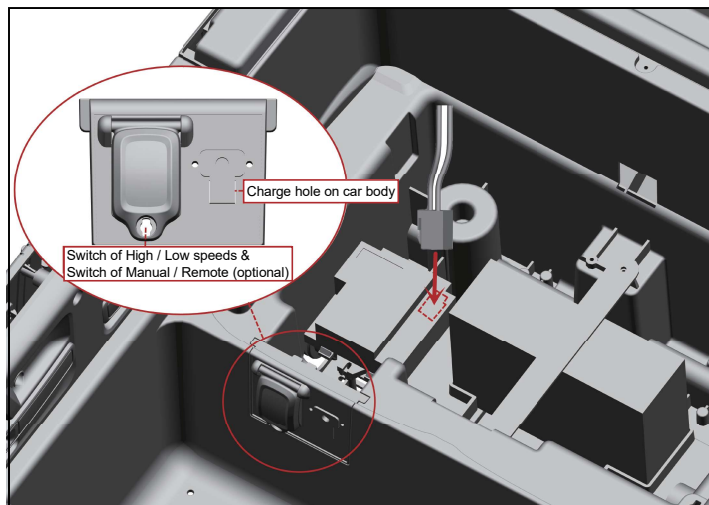


Instructions

4. Introduction for the car

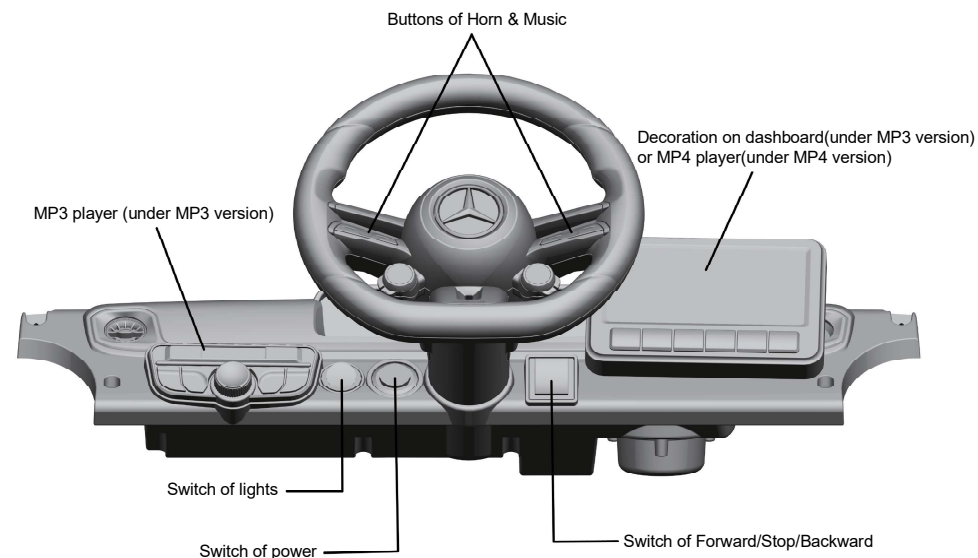

5. Introduction for MP3

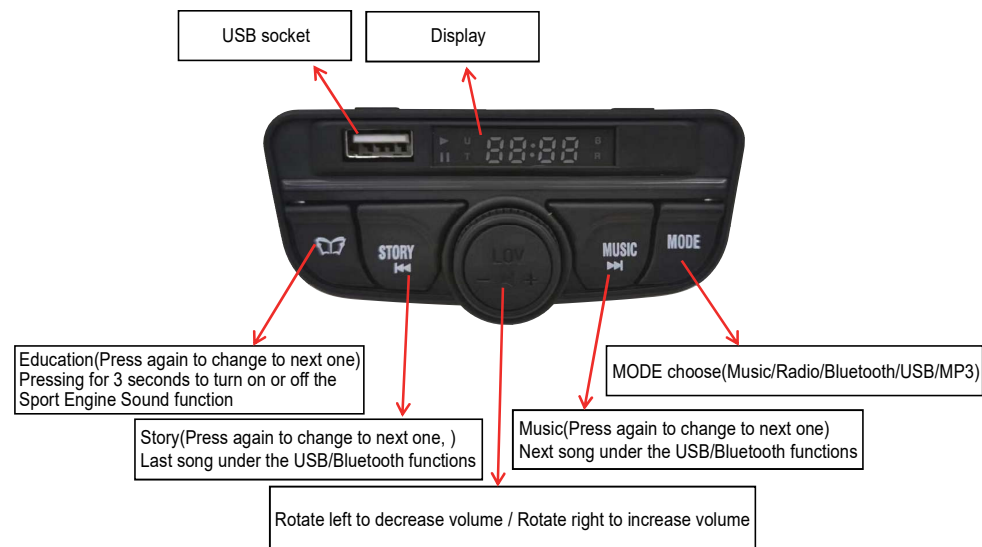

Instructions

Step 15: Install rearview mirrors

Insert the rearview mirrors(left and right) into the sides of the car according to the figure below.


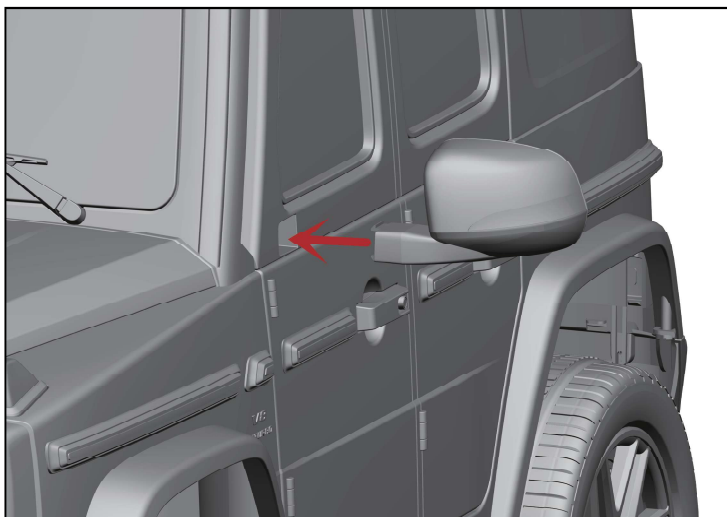


Diagram of the hidden tow wheels


When the car is powered off, it can be easily pulled by adults. Adults need to pull out the hidden tow wheels under the car and lift the head of the car.

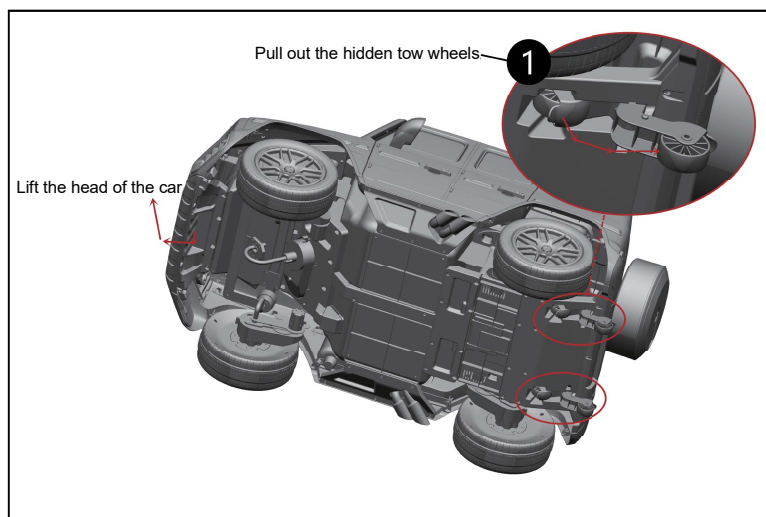

Installation steps


Step 9: Install decorative spare tire

Put the decorative spare tire onto the car body, and then fix it with 2 pcs of M4*12mm screws.

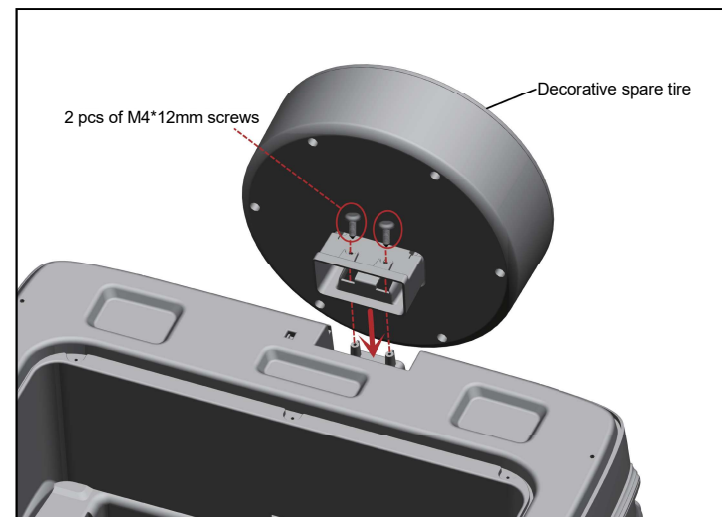

Step 10: Install rear upper part

Put the rear upper part onto the car body, and then fix it with 5 pcs of M4*12mm screws.

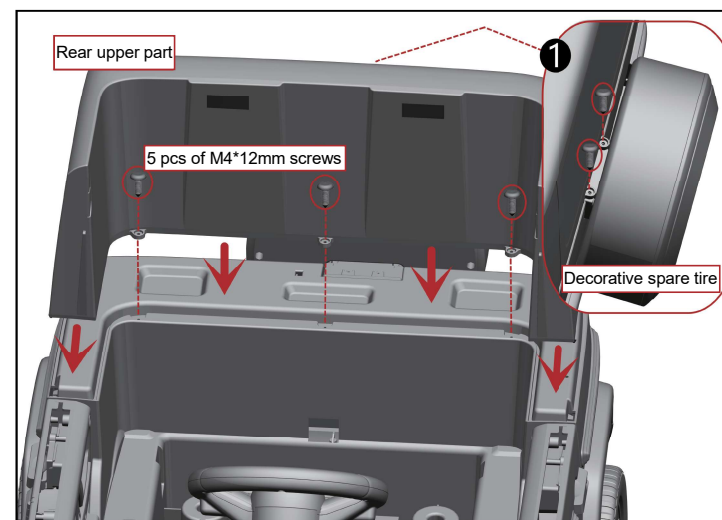


Installation steps

Step 11: Install seat


A. Install backrest of seat and baseplate of seat, and then fix them with 3 pcs of M4*12mm screws.

B. Put the seat into the car and insert the seat into the slot as shown in the picture B, and then fix the seat by locking the lock catch.

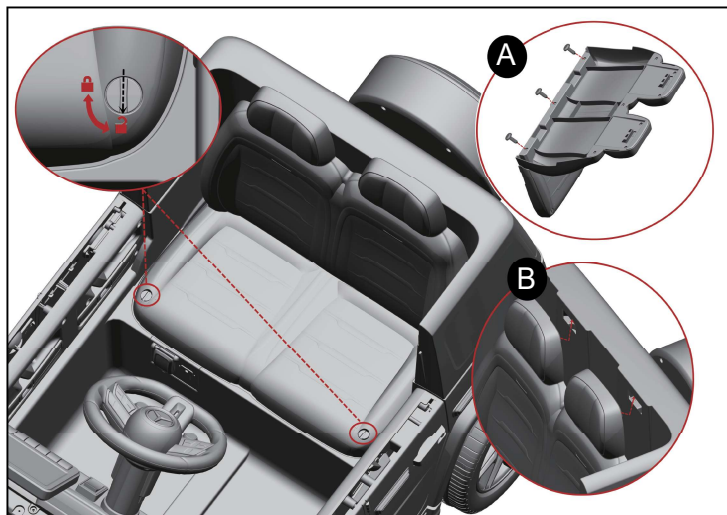

Step 12: Install window shield

Put the window shield onto the car body, and then fix it with 6 pcs of M4*12mm screws.

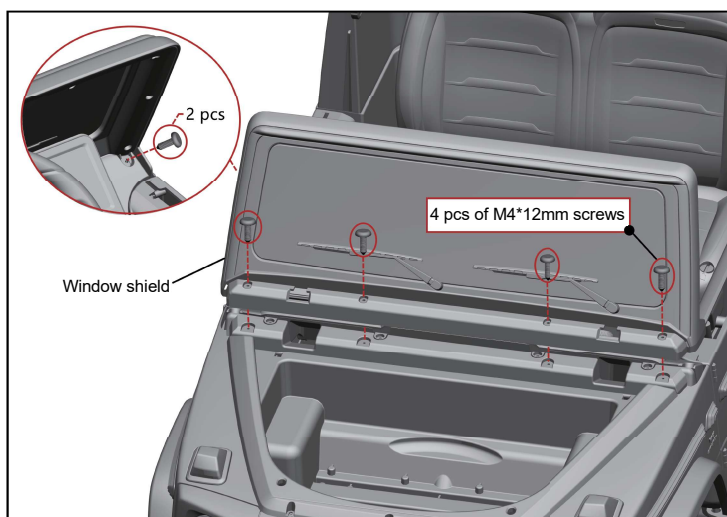


Instructions

Step 13: Install windows

Insert the window into the door, and then fix them with 4 pcs of M4*12mm screws.

Note: Operate on both sides like this.

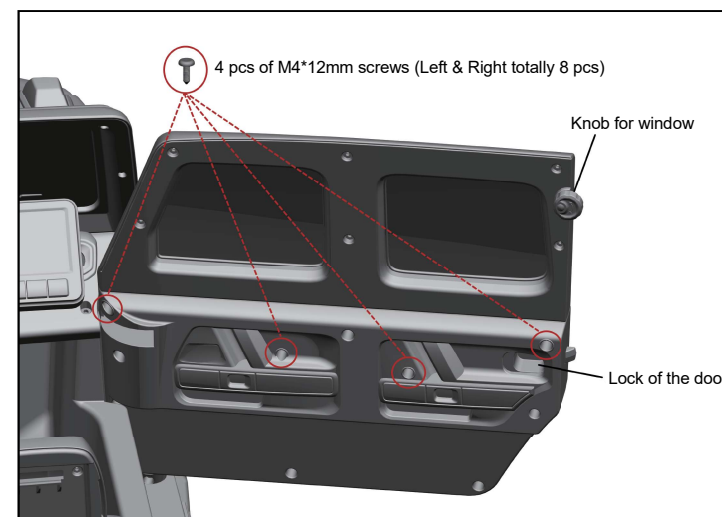

Step 14: Install hood

Install the hood according to the figure below.

