


RAM 3500 FIRE TRUCK

BATTERY POWERED RIDE-ON

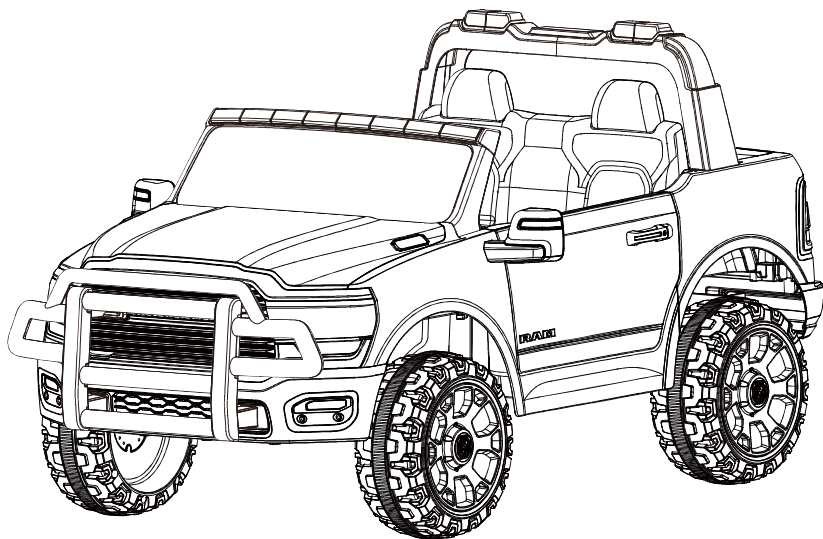

Owner's Manual with Assembly Instructions

Styles and colo(u)rs may vary.
Made in China.

The owner's manual contains important safety information as well as assembly, use and maintenance instructions.

The Ride-on Car must be assembled by an adult who has read and understands the instructions in this manual.

Keep the package away from children and dispose of properly before use.

Keep this manual for future reference.

On the purchase of your new Ride-On.

This ride-on will provide your child with many miles of riding enjoyment. To help ensure a safe ride we ask you to please read this manual carefully, and keep it for future reference.

Please follow the recommendations in this manual, they are designed to improve the safety and operation of your ride-on car and it's rider.

Ram and related logos, vehicle model names and trade dress are trademarks of FCA US LLC and used under license by Zhejiang Jiajia Ride-on Co., Ltd ©2025 FCA US LLC.

SPECIFICATIONS:

Battery	78k76MJ 07	8: kBMJ 07
Charger	78k7666 M	8: k7666 M

Suitable age: 9B3DA •

Load Capacity: j yz ; 6 “

Speed: 93A 5•

Size of ride-on car: 7; 6 0CD 0B: 0b

Power way: 0•v “” “ z

Charge time: C378 •

⚠ WARNING!

CHOKING HAZARD 3h v v 4c "vwz ' x•"y z yz 9A • 4i •z y x
x v" v v 2 zz x•"y z v v •z v z w" "4

ADULT ASSEMBLY REQUIRED.

M v z z zx"z v z "v v y wv" v y y" z wv' z v z w 4
e zx"z z " z • y wv 4M v zv • z v y " " •z zv •z z v " "
•z z•"xz4
d y"z z z " y4cz z z •z v 4
Xzz •v y 2•v"2v yx •z v v ' " " v 4
cz z zv z x•"y v z yzy4P"zx vy z " " " z "zy4M v zz x•"y " "z
•z x•"y " " z•"xz4
i zy xz •z " ' " 2vy z " " " z "zy4cz z z " vy v 2 zv
z•"xz 2 zv zz "x"z z 2 " " " •z w y"z ' v z 2v v
zv •z 2v y z z v z •v 8 "yz 4
cz z z " v'z x y" " x•v 2 v" 2 z y" 2 y2 v y2 " v z 2 •z " z
v z " v z zx zy vxx'y z x•v " " " z 2v y x y yv v"z •z z zx "xv
z w z 4
c wv zy " v'"x4
i •" • y wv zy "•xv " "xz " " z "zy v "y 'v x " " xv " "
" •z z •"y v "z 4
i •" " "vwz ' x•"y z yz 9A • y z " v " zzyFb v " z
z"• " ; 6 "4
i •" •v wv z4

⚠ BATTERY INFORMATION


- c 3zx•v "zv wz w z "z v z wv zx•v "zy4
- gzx•v "zv wz w z "z v z wv z zy ' •z wv' z wv" " x•v "zy4
- gzx•v "zv wz w z "z v z wv x•v "zy yz vy z " " 4
- P"z z z ' wv z "z z v y zy wv z "z v z wv "zy4
- Nv z "z v z wv " z zy "• •z x zx v " 4
- R •v zy wv z "z v z wv z zy ' •z 4
- i •z z " v v z wv • 3x" x "zy4

⚠ WARNING!

i •z z z x " v 2v y " v zy wv z v zy w vy 4

Parts Diagram | 3

UVi Eh z v • v z v z wzy w • 'yz ' z•'xz

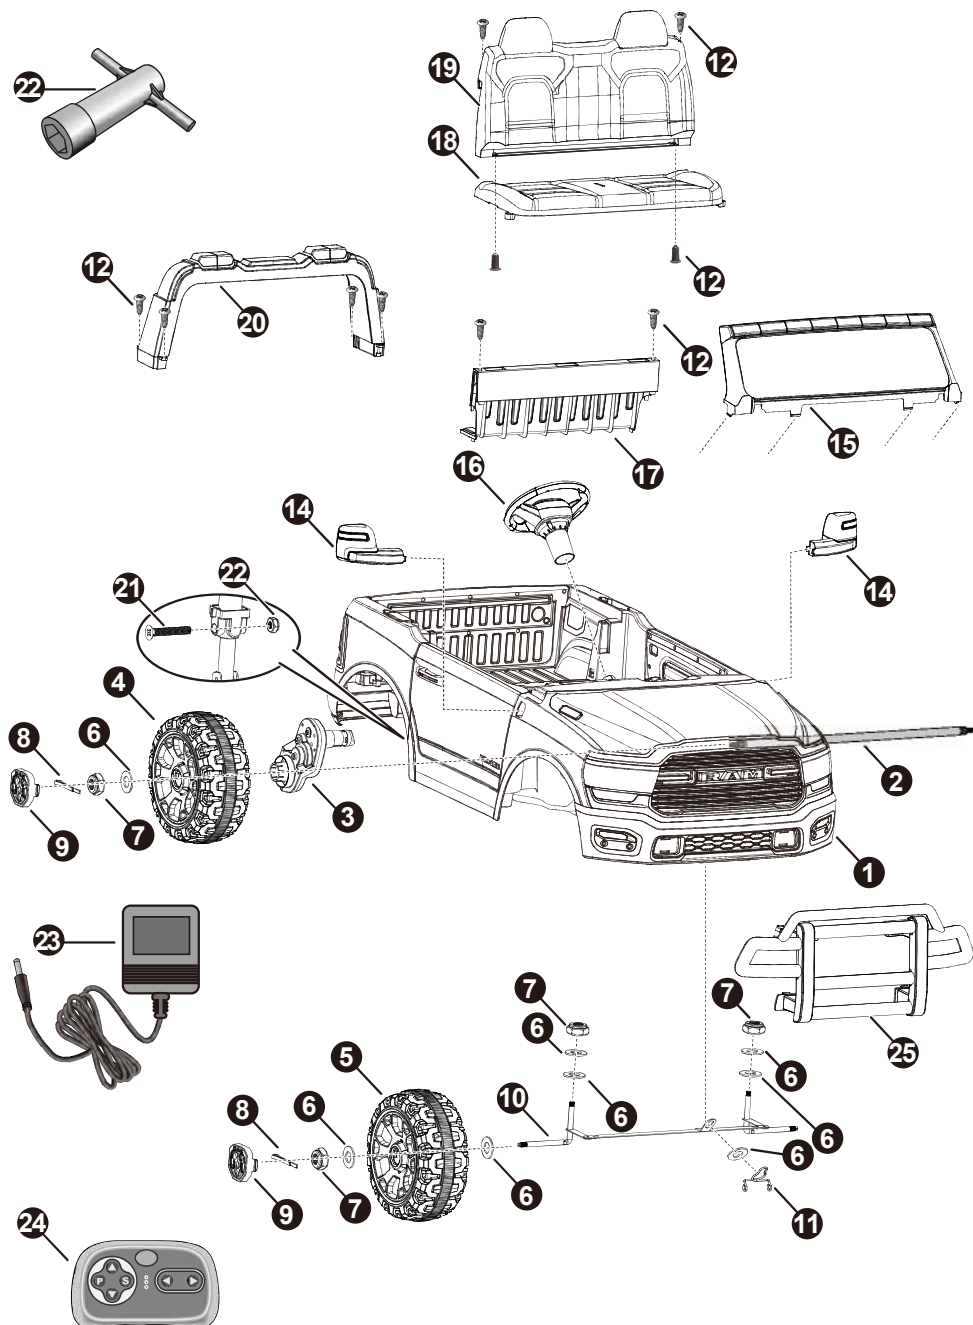

Parts List | 4


PART NO.	PART NAME	Q'ty (pcs)		REMARKS
		2WD	4WD	
1	kz•"x z w y	7	7	
2	gzv v z	7	7	
3	gzv "zv w	8	8	
4	gzv •zz	8	8	
5	S •zz	8	8	
6	b 78 v •z	77	D	7 x vxzy " •z v z w vx v"z2 •z vxzy •z v z
7	b 76 x	A	A	e vxzy •z v z
8	h " "	:	:	e vxzy " •z v z w vx v"z
9	U wkv	:	:	e vxzy " •z v z w vx v"z
10	S v z	7	7	
11	h v " "	7	7	e vxzy " •z v z w vx v"z
12	(: m78 x z	76	76	e vxzy " •z v z w vx v"z
13	a"• w	7	7	
14	h"yz "	8	8	az' v y "•
15	l " y •"z y	7	7	
16	h zz " " •zz	7	7	
17	h zv yz 3 •"z y	7	7	
18	h zv x •"	7	7	
19	h zv wx	7	7	
20	b A 96 vx•" z x z	8	8	e vxzy •z zv w y
21	b A x	8	8	e vxzy •z zv w y
22	h x z z x•	8	8	
23	0•v "z	7	7	
24	gz z x z	7	7	S g50 z
25	S w ww	7	7	

Assembly tools required (not included): Screwdriver




2WD-Attach the Front Wheels | 5a

HINT: If your product is All Wheel Drive (4WD), please refer to the next page to attach the front wheels.

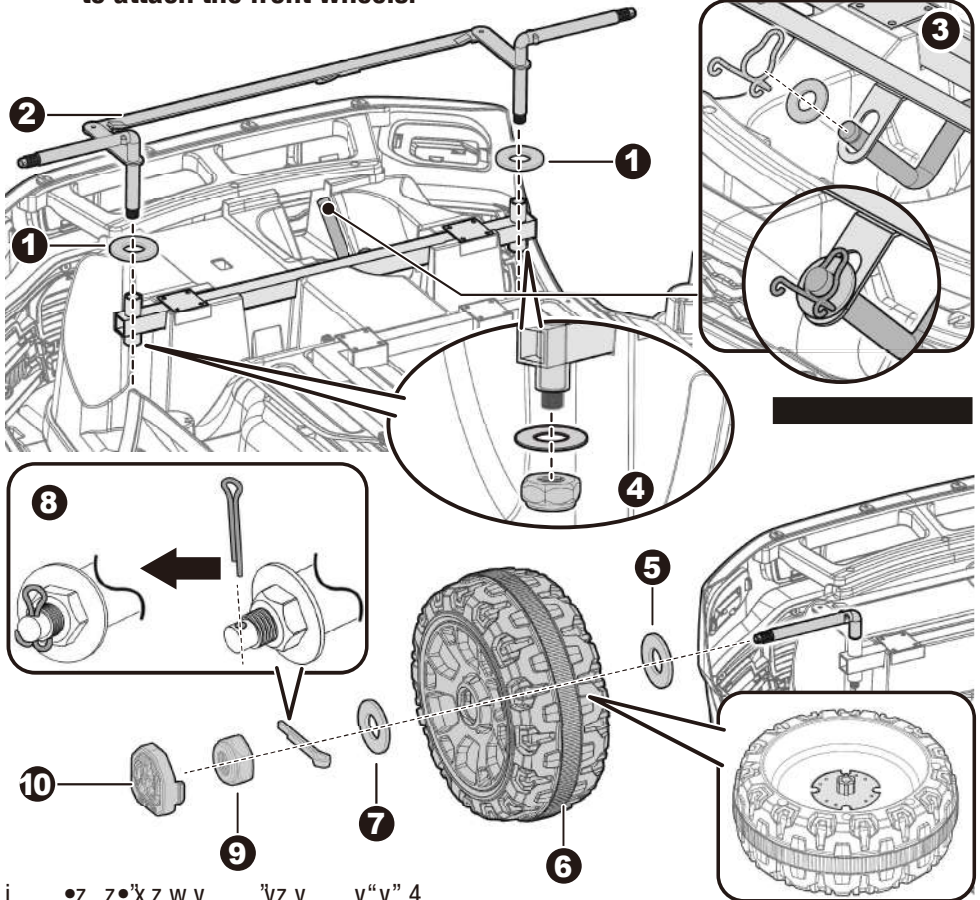


i z z x z w y yz y v "v" 4
 724h yz v b 78 v z zv x " v z 4M y " z " v z z w y 4
 94R z z w z y " z z z " " x v z " " z z " " v " z 4
 h yz v b 78 v z z w z y " z z z " " x 2 " z v " " " z " z
 z w z y " z z z " " x 4
 : 4S v b 78 v z z v z 2 " z v b 76 x z zv x z y " "
 v z " v x z z z x 4
 ; 4h yz v b 78 v z z " v z 4
 A4S v " z z z " v z 4
 B4h yz v b 78 v z z " v z 4
 C4V z v " " " z z z z y " z " v z 4 Nz y z z y " " " wx
 " " v " z " z " x yzy/4
 D4i " z v b 76 x z z y " z " v z " v x z z x 4
 764 h v z z wkv z z z 4
 gz zv z z : 3C v z w z z z " z z 4

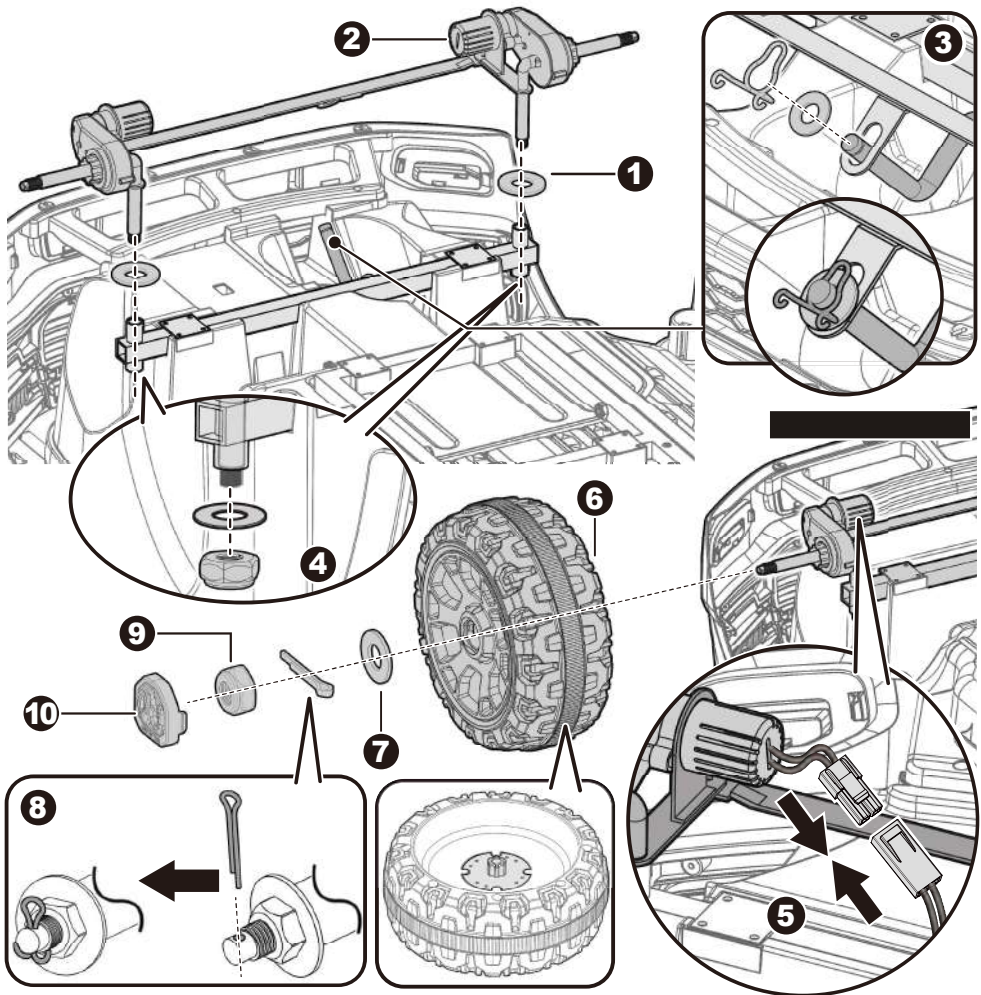

i •z z•x z w y "yz y v"v" 4
 7284h "yz v b 78 v •z zvx•' v z 4M y "•z' v z •z w y 4
 94R z •z w z y ' •z z z "x v z • "•z• z "•z z z " " v"z4
 h "yz v b 78 v •z •z w z y ' •z z z "x 2"•z v " " "•z " z
 •z w z y ' •z z z "x 4
 : 4S" v b 78 v •z •z v z 2 "•z v b 76 x •z zvx• z y ' ' v z "•v x z z x•4
 ; 4e "•z x z x •z' "zv w " •z x z x ' •z w y
 A4S" v' •z z •z' v z4
 B4h "yz v b 78 v •z •z' v z4
 C4V z v " " •z• z •z z y ' •z' v z4Nz y •z z y ' " " wx
 " " v " z "z "x yzy/4
 D4i "•z v b 76 x •z z y ' •z' v z "•v x z z x•4
 764 h v •z •wkv •z •z z 4
 gz zv •z z : 3C v z wz •z •z ' •z z 4

Attach the Rear Wheels | 7

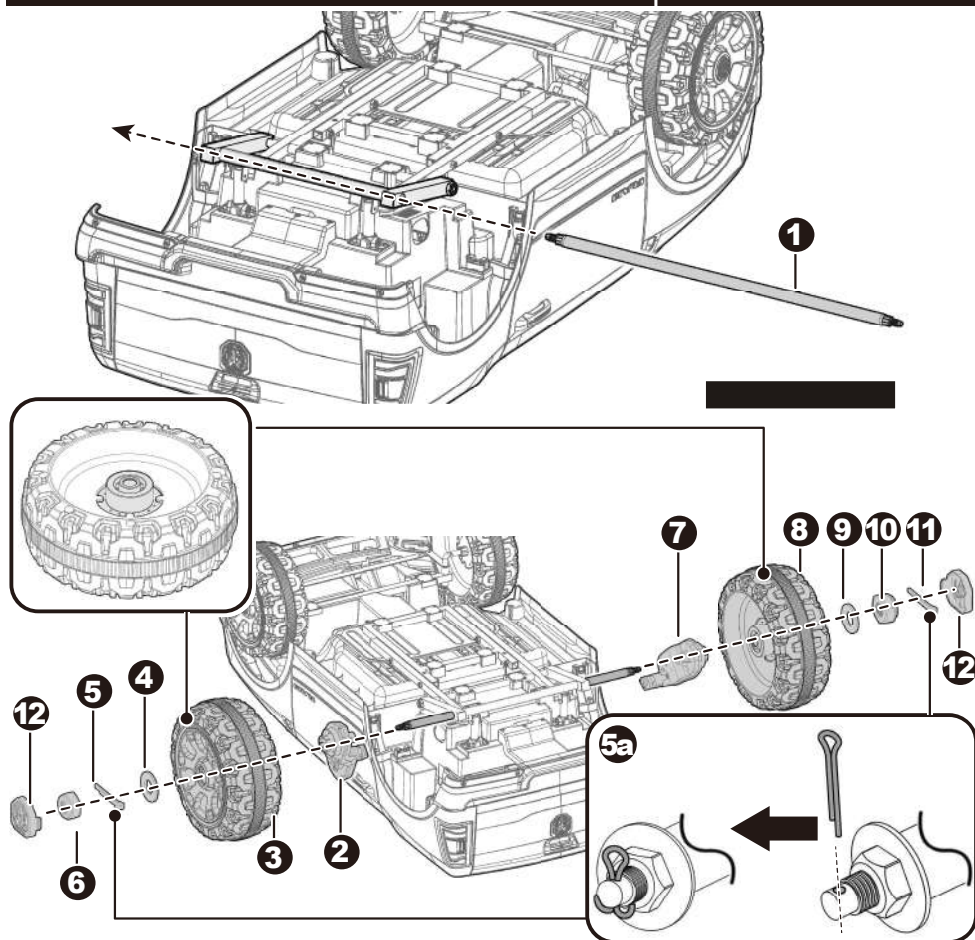


74V z •z zv v z v z • “•z•z” •z zv v z wv 4
 84h 'yz •z zv “zv w •z zv v z4V z •z x zx •z “zv w ” •z • z”
 •z z•x z w y v y zv x •z w z x v z 4
 94S” •z zv •zz •z zv v z4
 :4S” v b 78 v• z •z zv v z4
 ;4V z v ” ” ” •z • z •z z y ' •z ' v z4Nz y •z z y ' ” ” wx ” “
 v “ z ”z . ” x yzy/4
 A4i ”•z v b 76 x •z z y ' •z zv v z ”•v x z z x•.” x yzy/4
 B3764gz zv z 83A v z wz •z •z zv y ” ” “ •zz 4HINT: M z v v z •v
 wz 'yzy • y •z a x •z •z 'yz ' •z zv v z •z ”•z ” “ •z x
 •z •z 'yz4
 774h v •z • wv •z •zz 4

Attach the Steering Wheel | 8

e z v z ' • z z 73 vyy • z w z "z .c V x yzy/2v y z'z • z w z
" ' v " v "z 84


74l "v x z y "z z • z x z
• z w z x z x v zy " • z
x z z ' • z z z " " • z z 4
84gz z • z w z x z ' • z
' • z w z x v z 4
94V z 8 74 k Mmw z "z " • z"
x z x v "z 4
: 4e vxz • z w z x z z • z
w z x v z v y'v z " •
• z x z z zy " z z 4

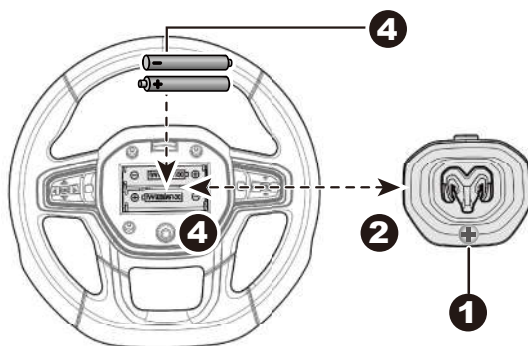


Attach the Steering Wheel

; 4V z • z z z " " • z z • z z z " " • z z " v "z 2 • " • z v " x "x
" vxz 4

HINT: There is an unlock button under the steering wheel, pressing and holding the unlock button can remove the steering wheel easily .

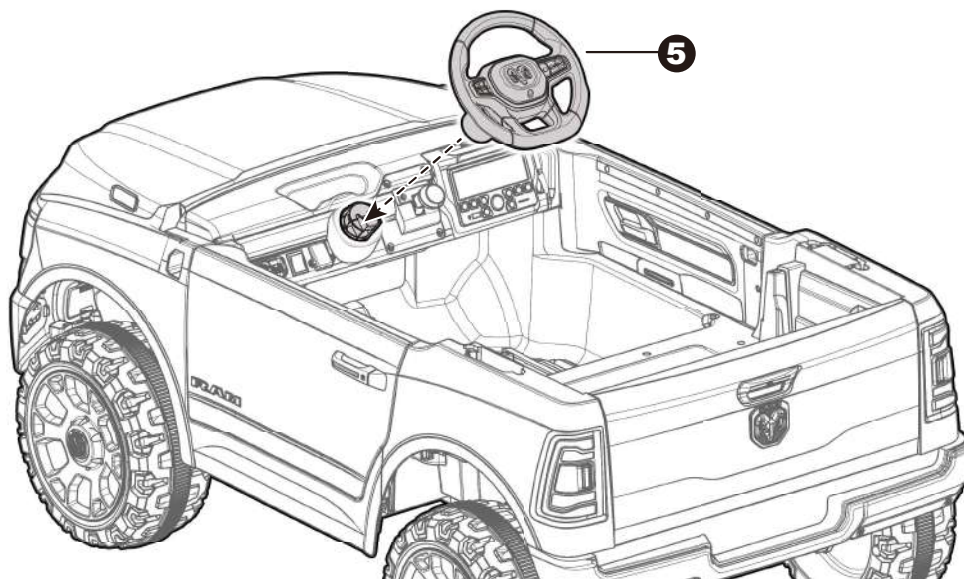


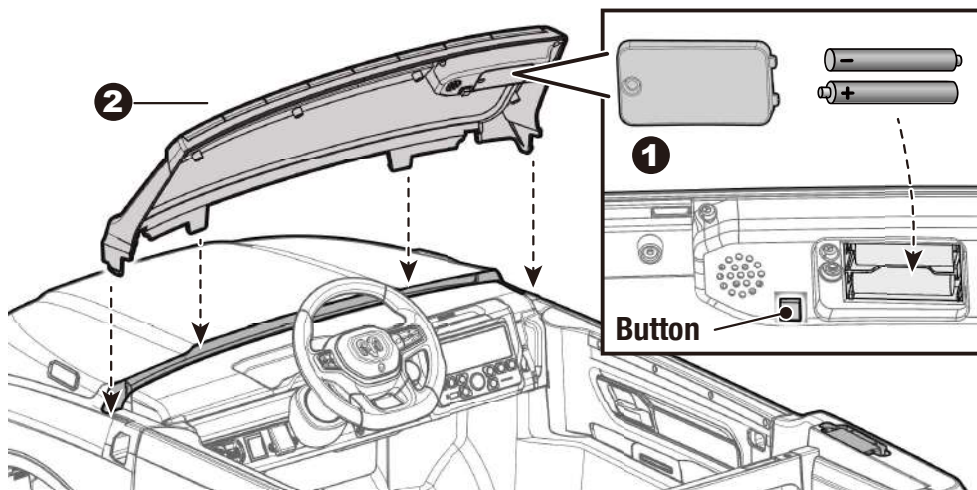


74j z v x z y " z z • z x z • z w z x z x v z y v w x ' • z
 " y • z y 4 g z z • z w z x z 4 v z 8 7 4 k M w z " z " • z " x z x
 v " z 4 M y z • z w x • z x " • z " • v z " " z 4 i • z
 z v x z • z w z x z 4

84S" • z " y • z y • z w y 2 • " " • z v " x " x " v x z 4

94S" • z " y z " " • z • z • z " y z ' • z w y 2 • " " • z v " x " x
 " v x z 4 g z z v ' • z • z " y z " 4

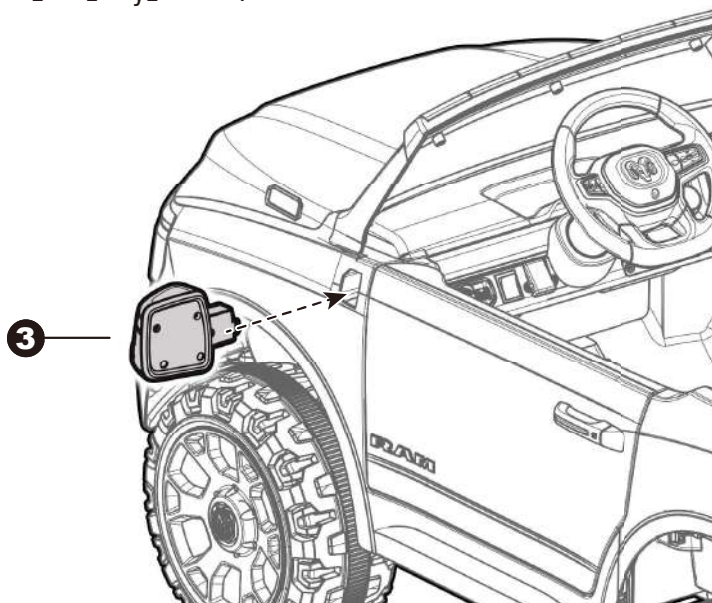

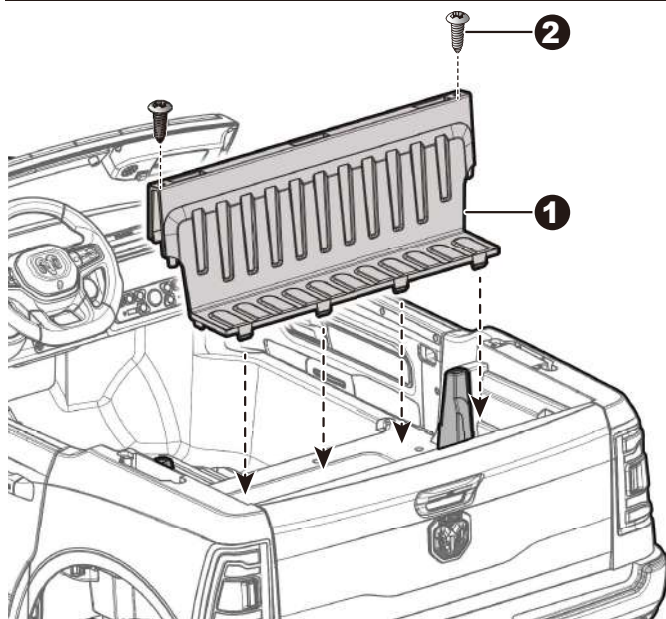


74S" •z zv yz 3 •z y •z w y 4


84V z (: m78 x z v y "•z "•v x z y " z 4


94S" •z zv x •" •z zv wx 4

: 4V z (: m78 x z ' w 'yz v y "•z "•v x z y " z 4

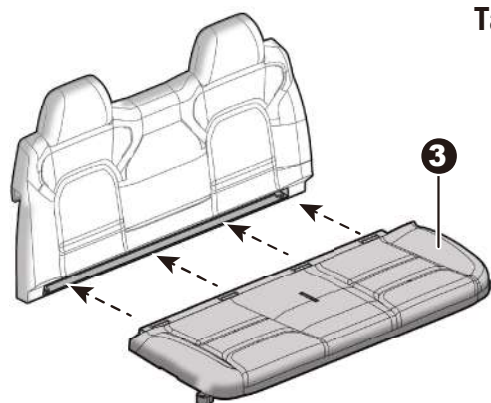

Tabs on seat back

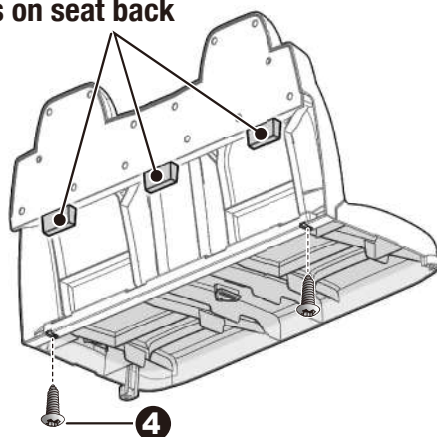

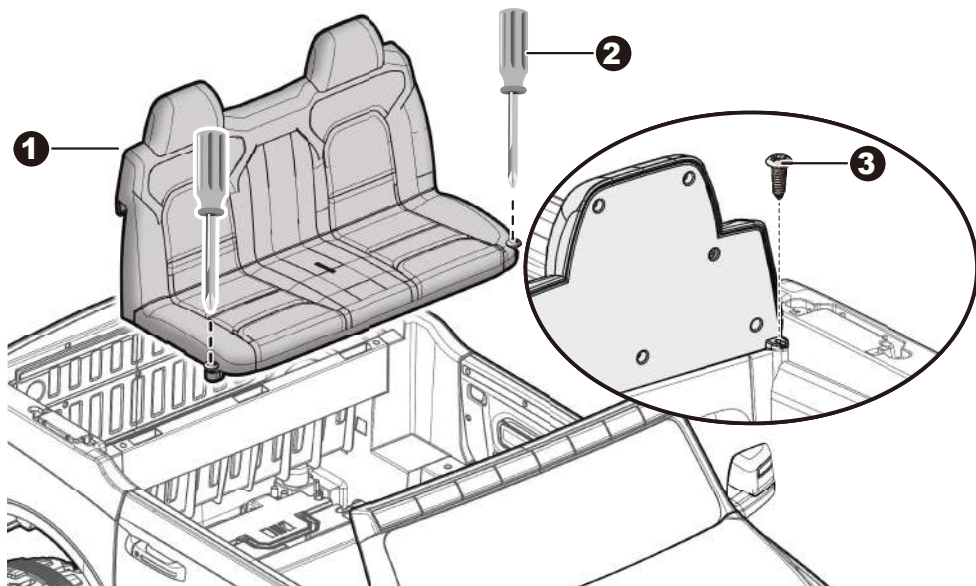

74S" •z zv v z w •z wy 4


84i "•z •z x z •z w • "yz ' •z zv x •" "•v x z y "z 4

94V z (: 78 x z " •z • z •z zv wx v y "•z "•v x z y "z 4


: 4e " •z x zx •z "• w " •z x zx •z wy 2v y "yz •z "zy
x zx " •z • z " •z wy 4

; 4S" •z "• w •z wy 2

A4V z ' (: m78 x z v y "•z "•v x z y "z 4

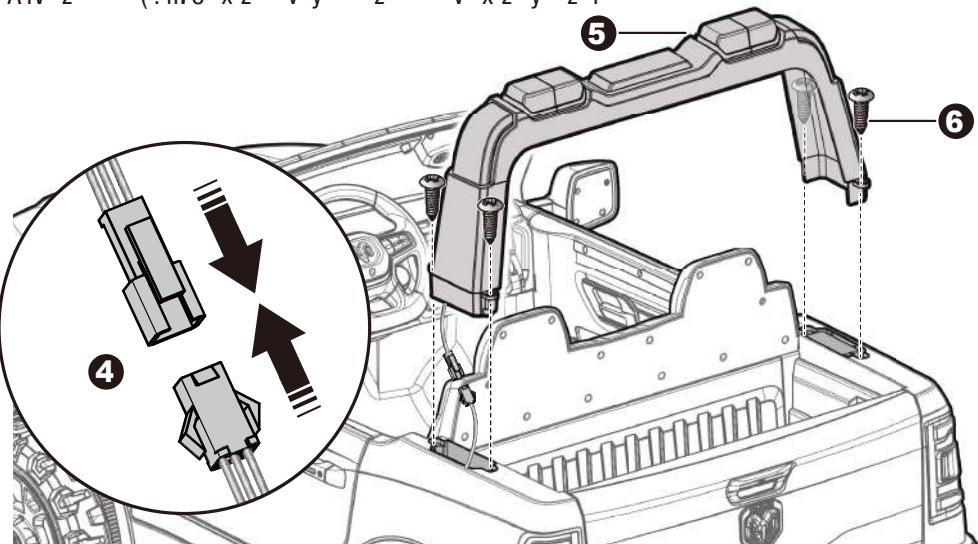


Plug the Bull Bar & Connect the Power Supply 12

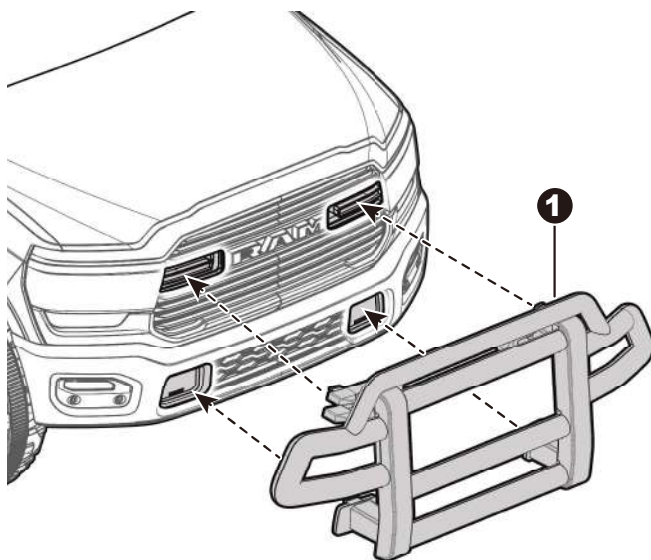


74S" •z ' w ww •z
 • z •z ' ' •z
 w y 4e • " " •zv
 " x "x " vxz4

84j z v x z y " z
 z •z x z
 •z ' •z • y2
 v y z z •z • y4

94e " •z x zx
 •z w z " •z
 x zx •z w y 4
 M y z vxz •z • y4

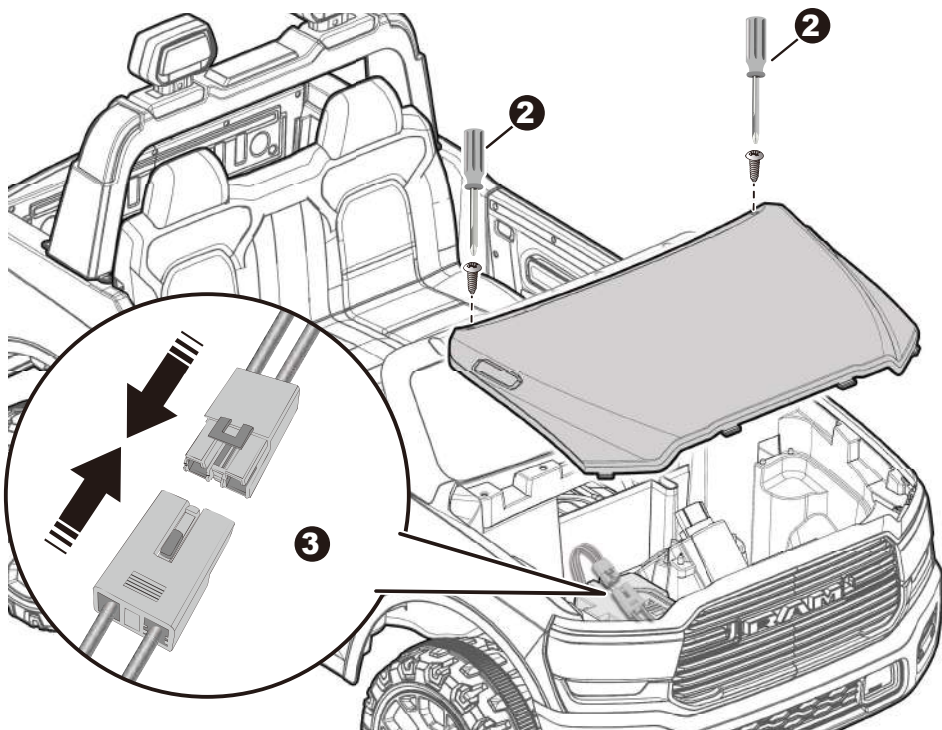

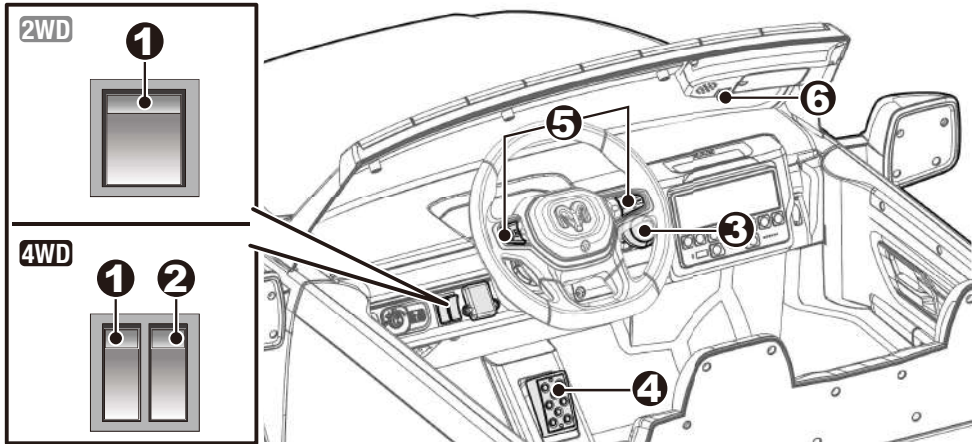

1. Power switch: i •z y x v y "4

2. 2WD / 4WD switch (This switch is only equipped on the four-wheel drive version):

M " " •z y x wz "x•zy wz zz :3 •zz P "z v y 83 •zz P "z yz 4

3. Forward/reverse level: 0•v "z •z y"zx " •v y x z ' ' v y z z z4

•i z •z y x ' v y2 •" •z z z " " 4

•i z •z y x wx v y2 •" •z z z y " " 4

IMPORTANT: Always stop vehicle when changing the speed or direction to avoid damage the gears and motor.


4. Foot pedal: M "z z . zzy/ •z y x 4

•i z •z y x 2 z •z zyv y 4

•i wv z y 2 z zv z z z ' •z zyv 4


5. Sound buttons: e z ' y v " "4

6. Police light button: i •z "xz "• ' •z " y •zy v y "4

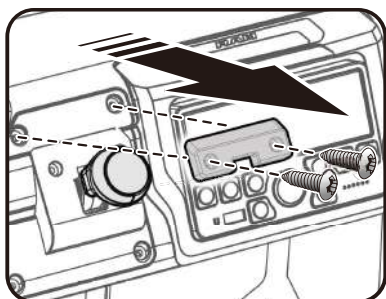

High speed

The high speed lock-out can only be removed by an adult. Remove the high speed lock-out for high speed.

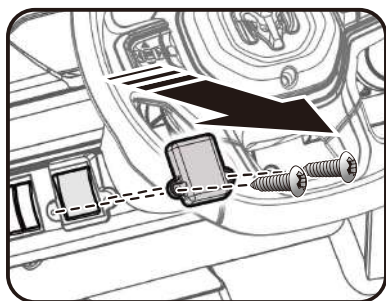


RC-Pedal switch

The RC cover can only be removed by an adult.

- Press the switch to “RC”, and the ride-on will only be controlled by the remote controller.
- Press the switch to “PEDAL”, the ride-on will only be controlled by the driver.


Use the Audio Player

The player will automatically turn off after 30 minutes of inactivity.

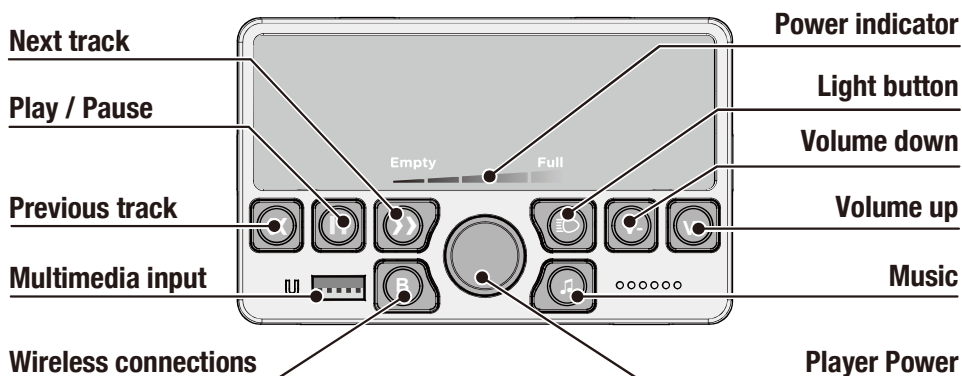


⚠ WARNING!

- **The RC cover can only be removed by an adult.** The remote control should only be used by an adult.
- This product is only controlled by the remote controller when in Remote Control mode.

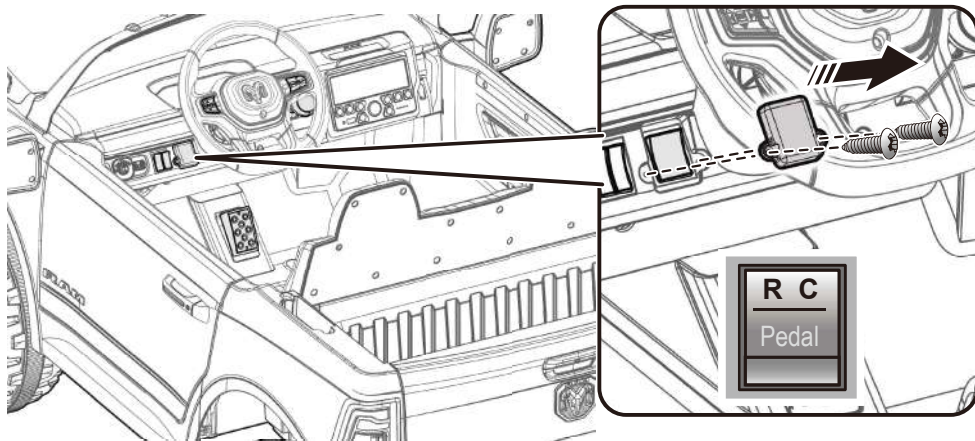

1. Remove RC cover with a screwdriver.
2. Press the RC-Pedal switch to " RC " .
3. Replace the RC cover.

Attach the battery to the remote control

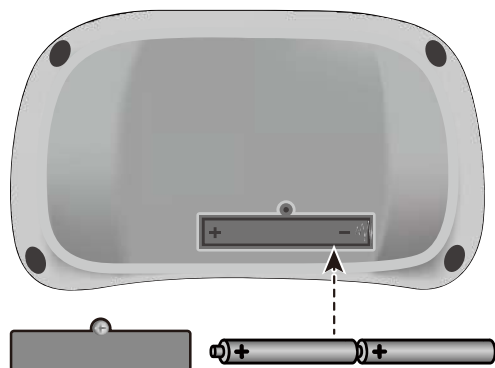

Use a screwdriver to loosen the screw on the back side of the controller and remove the battery compartment door, and " z 8 74 k MMw z 'z " •z" x zx v "z 4

HINT: Batteries not included. Refer to the Battery Information on page 2.



N v z w

gz z z w

h zzv z zx w

$$\begin{matrix} 0 & zx \\ w \end{matrix}$$

g^{xx} • " "

w

az' " " "
w

U^u • zzy " y"xv
c v zzy " y"xv
a zzy " y"xv

e z v y • y • z x z x w ' 9 z x y 2 • z 3 zzy " y"xv ' v • z 2
zv • v • z z z x z " " • z x z x zy v z4i • z z • z z•x zE
i • z 3 zzy " y"xv " z " w"• 2 zv • z x z x " xxz ' 4
V • z 3 zzy " y"xv z z2 zv • z x z x " 'v"zy4i " • z
z z x z .w z " " • z w z z / v y • z z•x z4M y v"v" 4

e z •z w •z z •x z2 z ” v“v” z z v z •z w v z4


i • z " x • z v z • z z • x z z " 2 v • " • z z v 4

HINT: The vehicle is designed to operate in low speed only in reverse.

azv z •z z z x z 'y" " ' vw 76 zx y 2" " • y v v 'xv 4
M z z vx" " •z w z 'z ' •z z z x z 2 zv z zw"y •z x zx" 4
z 7/

How to switch the product back to Pedal (Manual) mode

- This product is only controlled by the driver when in Pedal mode.



1. Remove the RC cover
2. Press the RC-Pedal switch to “ Pedal ”.
3. Replace the RC cover.



WARNING!

The remote control is not a toy. It is for the adult use only, and should not be used by a child. A close adult supervision is always required. Reception range may change significantly with weather, battery, and other environmental conditions.

⚠ WARNING!

- **ONLY an adult is allowed charge and recharge the battery!**
- **This charging protection will cut all all the functions of the vehicle when charging.**



j z vw z .z / v y x •v “z zx”zy w •z v 'vx z 4j ” “ v •z
vw z x •v “z v xv z v ’”z z ” 4P z •z vw z x •v “z
' v •z y x 4

- Damage to the battery may occur if it is completely drained.
- Charge the battery for about 8 - 12 hours. Do not charge the battery for more than 20 hours.
- Charge the battery at least once a month even if not operating the vehicle for a long time to maximize the battery life.
- Do not charge or store the battery upside down.
- Keep the charger and battery away from flames, sparks, or any flammables.

- The vehicle must be OFF when charging.
- When the vehicle begins to run slowly, recharge the battery.
- When the product is stationary, the power indicator will tell you how much power is remaining in the battery. If only one indicator light remains, please recharge the battery.




12V product	less than 12.5V	The battery needs to be charge.
24V product	less than 24V	

Charging (Option 1)

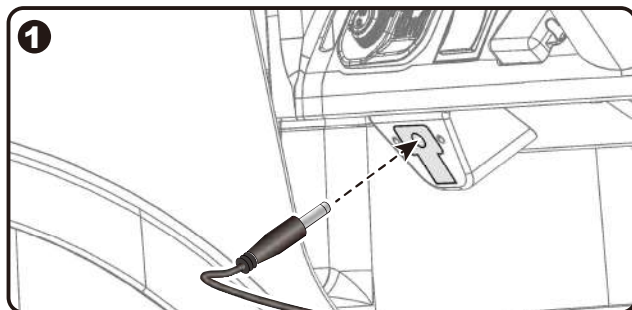

74e “ •z x •v “z ” •z ” x z .a xv zy •z z z' 'yz ' •z yv •/4
84e “ •z x •v “z “ ” v v z 4i •z vw z ” vZ “ ” x •v “ ” “ 4

Charging (Option 2)

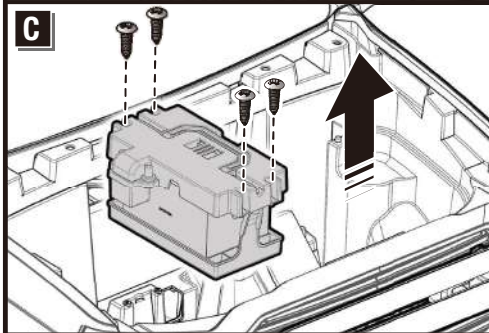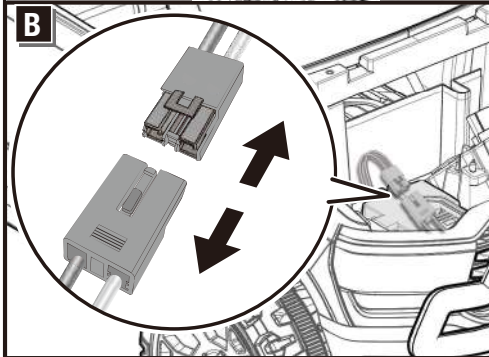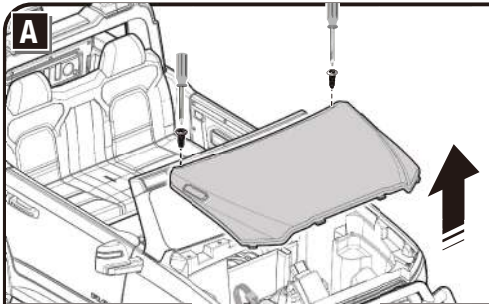



MEj z v x z y " z z • z
x z • z ' • z • y
v y z z • z • y4

NEj " • z zy x zx ' zvx • • z 4

O4a z • z ' x z v y
• z w z w " • v x z y " z
v y " • z w z w 4

P4e vxz • z w z w v ' v
" y4 e " • z x • v " z
" • z " x z • z
w z w 4

R4e " • z x • v " z " " v v
z 4i • z w z " w " "
x • v " " " 4

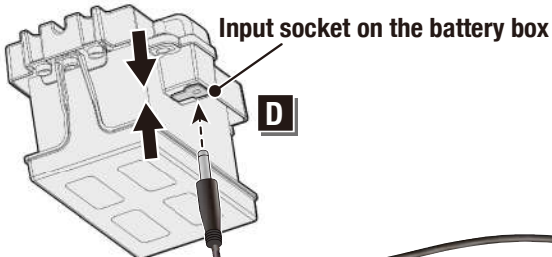

Problem	Possible Cause	Solution
Vehicle does not run	Battery low on power	Recharge battery.
	Thermal fuse has tripped	Reset fuse, see <Fuse>
	Battery connector or wires are loose	Check that the battery connectors are firmly plugged into each other. If wires are loose around the motor contact your distributor please.
	Battery is dead	Replace battery, contact your distributor please.
	Electrical system is damaged	Contact your distributor please.
	Motor is damaged	Contact your distributor please.
Vehicle does not run very long	Battery is under charged	Check that the battery connectors are firmly plugged into each other when recharging
	Battery is old	Replace battery, contact your distributor please.
Vehicle runs sluggishly	Battery low on power	Recharge battery, contact your distributor please.
	Battery is old	Replace battery, contact your distributor please.
	Vehicle is overload	Reduce weight on vehicle.
	Vehicle is being used in harsh conditions	Avoid using vehicle in harsh conditions, see <User Notice>.
Vehicle needs a push to go forward	Poor contact of wires or connectors	Check that the battery connectors are firmly plugged into each other. If wires are loose around the motor, contact your distributor please.
	"Dead Spot" on motor	A dead spot means the electric power is not being delivered to the terminal connection and the vehicle needs repair. Contact your distributor please.
Difficult shifting from forward to reverse or vice-versa	Attempting to shift while the vehicle is motion	Completely stop the vehicle and shift, see <Use Your Ride-On>
Loud grinding or clicking noises coming from motor or gear box	Motor or gears are damaged	Contact your distributor please.
Battery will not recharge	Battery connector or adapter connector is loose	Check that the battery connectors are firmly plugged into each other.
	Charger not plugged in	Check that the battery charger is plugged into a working wall outlet.
	Charger is not working	Contact your distributor please.
Charger feels warm when recharging	This is normal and not a cause for concern	

Completely read through this manual and the troubleshooting guide table before calling. If you still need help resolving the problem **Contact your distributor please.**

V" v z z "w" x•zx v" v ' •z w' z " "2b z" v
 z v "z' z 'v •v v y2 x•v •z w z 2x•v "z2xvwz x y2 "2 x z
 v z 'v z " "z x z ' •z v v y •v " •z z z ' x•yv v"z2 •z
 wz zy " •v yv v"z •vy wz z z zy4
 ev •z z•"x z" y x z " "•v v zx " ' z zv •z 4
 gzx•v "z •z w z v' z zvx• z4d v vy xv •v y z •z w z 4gzx•v "z
 •z w z v zv xz v • •z •z z•"x z v"yz " wz" " zy4
 P v • •z z•"x z "•v • z4P v • •z z•"x z "• v v y v z 4P
 y "z •z z•"x z" v" zv •z 4l v z " yv v"z •z 2z zx "x
 z v y w z 4
 0zv •z z•"x z "•v ' 2y x •4i z z •"z v "x v 2 z v 3
 v ' " z " •4P z xv v 4P z v w v "z x z v z 4
 l •z " "2v •z z zx "xv xz • y w "4i " •z z "x•
 v y y" x zx •z w z x zx" 4

Fuse

i •z w z 'zv z v •z v ' z "•v z ' z •v " v v "xv " v y x v
 z •z z•"x z " •z 2z zx "x z w z " z vyzy4i •z ' z "
 z z v y z " wz z zy v' z •z " " zy dSS' 86 zx y v y •z
 zy dc v"v" 4V •z •z v ' z " z zv zy y " " v z2 •z z•"x z v
 zzy z v"4Contact your distributor please.

i v 'y " " z 2' •z z " 'yz" z E
 •P z vy •z z•"x z4
 •P v •" " wz•" y •z z•"x z4
 •P y "z zz z 4
 •P y "z " 'zy wzx 2 •"x• v xv z •z •zz " 2xv " " •z
 z •zv 4
 •P y "z " z • zv •z 2x z v z •zv 4
 •P v v z •z " 'y x z " x vx "• •z w z •z z zx "x
 x z 4
 •P v z "• •z z zx "x z 4P " " v x z v z v • 2xv " " •z ' z " 4



RISK OF FIRE. Do not bypass. Replace only with a new fuse.

Battery Disposal



i •z ww z " z z v z •z vw" • y v x•v "z4Pz z y" " •z v ' z2v y
v " "x y" 2 •z ww z • y z v z ' z •zz zv 4
V v !gzx xz •z yzvy ww z z "w 4i •z ww z x v" zvy vx"y .z zx z/v y
wz y" zy ' z v y z"v 4V" "z"v " v zv "x" z v z zvy vx"y ww z "z
y" z ' •z " v y'" 4i v z " v 'zyz v v z3v zy zvy vx"y ww z zx xz 2
x•v xv v "z ww z z v"z 4
P • •z ww z v v "• z" v • z• y v z!

**Our products are suitable for
ASTM F963; GB6675; EN71 and EN62115 standard.**