

Safety Precautions:

This safety precaution description is about how to make your child happy and safe to use Products, please pay attention to the following safety precautions.

- 1, charging adults must operate from the children themselves do not charge
- 2, must be under the supervision of adults driving this car
- 3, the product must be adult adults from the adult before the assembly or use is correct
- 4, is strictly prohibited in public streets and other roadside slopes swimming pool dangerous place to play
- 5, the car can not overload the maximum load capacity of 30 kg
- 6, this product is only suitable for children aged 37 months and above Do not allow children aged 3 and below
- 7, note that some parts will be damaged due to improper driving
- 8, in the driving is prohibited suddenly change the forward and reverse switch function should be static switch function.
- 9, the car can only be cleaned with a clean cloth scrub can not be washed with water to avoid damage to components.
- 10, the charger is not a toy Please charge after the collection is complete
- 11, the product is a plastic product away from the fire.
- 12, the product in the process of using the motor at the start will have a spark therefore prohibited at the gas station flammableExplosion hazard and other areas
- 13, please pay special attention to children rush to contact the wheel or wheel near the location to avoid injury injury.Do not allow other children to approach the car during use
- 14, the car is suitable for driving on a flat surface Try to avoid the sediment or uneven driving.
- 15, Please do not give any play to the children after the package is disassembled so as to avoid the danger to the children.
- 16, the product is for children so that their guardians have the responsibility to understand the contents of this note to guide children correctlyOperational use
- 17, the car attached to the seat belt is only for children to increase awareness of safety toys do not have asPeople vehicles have the safety role
- 18, Please guide children how to relax start the accelerator pedal and the vehicle how to deal with obstacles and howStop the car.
- 19, correctly loaded batteries, pay attention to positive and negative.
- 20, the battery can be charged and removed but not heated into the fire to avoid short circuit.
- 21, non-rechargeable battery can only be charged under adult guardianship
- 22, when the battery power when the remote control distance will be shorter at this time please replace the new battery
- 23, if not for a long time please remove the battery to avoid leakage corrosive battery should be removed from the body when no electricity.
- 24, the power terminals may not be short circuit.Regularly check the product and the charger used to see if the wires, plugs, housings, and other components areDamage should be discontinued when found to be damaged until repaired.

Children's electric tricycle




Parts

					
handlebar	Front tile	Goggles	reflector	Wheel	Auxiliary wheel
					
Base plate	Backrest	Front fork trim	Rear light	Body	Trunk


Installation instructions



1. Install the auxiliary wheel: align the auxiliary wheel to the body. On both sides, tighten the screws;

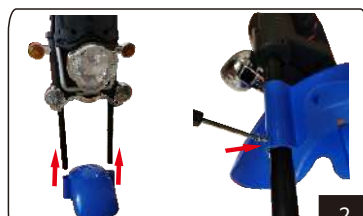

2. Install the front bush: align the front bush with the front fork. Thread into the handlebar and tighten the screws.

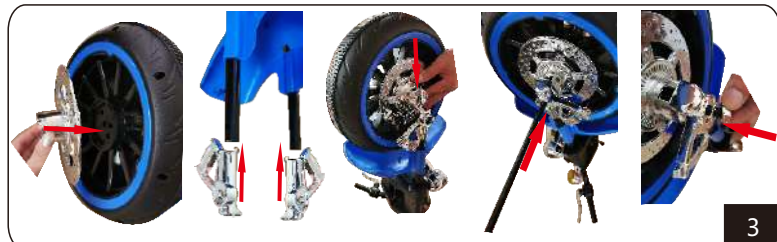

3. Install the front wheel: fix the wheel on the front wheel and then align the front fork decoration and front wheel respectively. Fix the front fork, then insert the axle into the front wheel of the front fork, insert the washer and tighten the screw.




4


4. Install the handlebar: connect the front fork line with the body line, and then the handlebar and the front hole of the body. Align and insert the shaft and tighten the screws. Install the reflector: align the reflector with the handlebar hole and press to tighten it.



5. Install the wind deflector: attach the wind deflector. Aim at the front of the car. The buckle can be fastened.

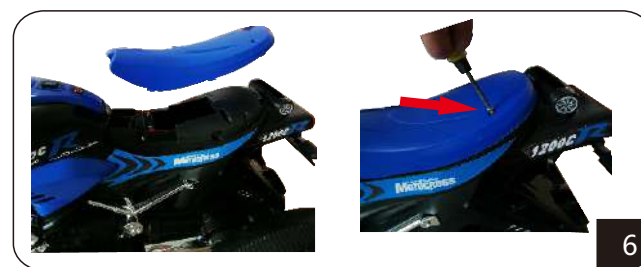

6. Install the seat plate: Place the seat plate on the top of the car body and use screws. Just tighten;

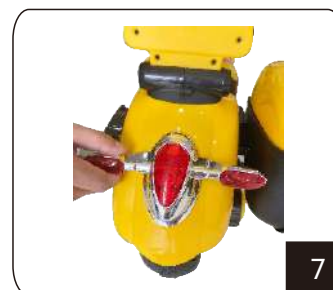

7. After installing the last card: put the last card on. Use screws to tighten the rear of the body;



8. Install the backrest: put Backrest aligned with body. The tail is pressed and stuck OK.



9. Connect the power cord: turn red. To red, black to black.



10. Install the trunk: align the trunk. Both sides of the rear tail can be tightened with screws.